Yokogawa AAI143-H50

16-Channel HART Analog Input Module

Yokogawa AAI143-H50 connects sixteen 4–20 mA transmitter signals to a CENTUM FIO control system, providing a compact input interface for process measurement. Its HART capability combines analog measurement with digital communication to compatible instruments. Each channel can be configured for a two-wire or four-wire transmitter using its setting pin, and the module supports dual-redundant arrangements. AAI143-H50 is an input module, so it should be distinguished from similarly named output modules when ordering replacement cards.



Technical Specifications

Product Identity	
Manufacturer	Yokogawa
Complete model	AAI143-H50
Dimensions (W × H × D)	32.8 × 130 × 107.5 mm; module only
Functional Configuration	
Function	Analog input with HART communication
Input channels	16; isolated input module
Input signal	4–20 mA DC
Transmitter selection	Two-wire or four-wire; setting pin per channel
Performance & Power	
Allowable input current	24 mA
Accuracy	±16 µA
Data update period	10 ms
Transmitter supply	≥19 V at 20 mA; current limit 25 mA
Maximum current consumption	230 mA at 5 V DC; 540 mA at 24 V DC
Environment	
Protection option	Standard version without explosion protection

Selected original manufacturer pages follow on pages 3–5.

Compatibility & Selection Guide

System compatibility. AAI143-H50 belongs to the CENTUM FIO platform. The Release 6 environment includes AFV30/AFV40 field control stations, VP6F1700 control functions and VP6E5100 engineering. The -H50 code selects HART, no explosion protection and the basic type. Replacement checks must include system release, hardware Style, transmitter configuration and the exact terminal-adapter option.

Wiring & Installation Reference

Signal and connection checks

Signal. 4–20 mA DC · Allowable input current 24 mA

Channel setting. Two-wire / four-wire · Set each channel for its transmitter

Supply budget. ≥19 V at 20 mA · Include external wiring drop

Module fit and configuration

Confirm the system position.. Match the field control unit, node type, complete module code and existing configuration before replacement.

Match termination and dimensions.. Use the specified terminal/cable interface and check the module envelope against the installed assembly.

Verify the configured function.. Confirm -H50, hardware Style, two-wire/four-wire channel settings and the existing single or dual terminal adapter.

Installation precautions. Use an isolation barrier when an intrinsically safe interface is required; do not connect a Zener barrier. Confirm each transmitter setting and the selected terminal adapter before applying field power.

View connection specifications (PDF) · PDF page 3 | View mounting dimensions (PDF) · PDF page 4

Manufacturer sources: Analog I/O Modules (for FIO).

● Current Input Modules (Isolated)

This module provides 16 inputs of 4 to 20 mA signal. It can be used in dual-redundant configuration.

Items		Specifications
Model		**AAI143 (*1)**
Number of input channels		16, isolated
Input signal		4 to 20 mA
Allowable input current		24 mA
Withstanding voltage		Between input and system: 1500 V AC, for 1 minute (*3)
Input resistance	**Power ON**	270 Ω (20 mA) to 350 Ω (4 mA) (*2)
	Power OFF	500 kΩ or larger
Accuracy		±16 μA
Data update period		10 ms
Transmitter power supply		19.0 V or higher (at 20 mA) 25.5 V or less (at 0 mA) (output current limit: 25 mA) (*4)
Setting of 2-wire or 4-wire transmitter		For each channel by setting pin
Drift due to ambient temperature change		±16 μA/10 ˚C
Maximum current consumption		230 mA (5 V DC), 540 mA (24 V DC)
Weight		Approx. 0.30 kg
External communication		Pressure clamp terminal, MIL connector cable, dedicated cable (KS1)
HART communication		Available

*1: A Zener barrier is not allowed to be connected with this module. Use an isolation barrier when the module is used in intrinsically safe application.

*2: The module input resistance viewed from the terminals depends on the current strength as calculated as below:

$$250\ \Omega + \frac{\text{voltage drop in the input protection circuit}}{\text{current value}}$$

F04E.ai

*3: When the dedicated cable is used, the withstanding voltage is 500 V AC (between the input signal and the system). When the ML connector cable is used, the withstanding voltage depends on the electrical specifications of the cable.

*4: This voltage is generated between the connecting terminals for 2-wire transmitters for this module. When calculating the minimum operating voltage for transmitters, consider to allow margins for voltage drop in external wiring.

● Current Output Module (Isolated)

This module provides 16 outputs of 4 – 20 mA signal. It can be used in dual-redundant configuration. (*1)

Items	Specifications	
Model	**AAI543-□5□/-□E□**	**AAI543-□6□/-□F□** (*2)
Number of output channels	16, isolated, standard switch-over response in redundant configuration (*3)	16, isolated, fast switch-over response in redundant configuration (*3)
Output signal	4 to 20 mA	
Withstanding voltage	Between output and system: 1500 V AC, for 1 minute (*4)	
Allowable load resistance	0 to 750 Ω	
Circuit-open detection	Less than 0.65 mA	
Accuracy	±48 μA	
Data update period	10 ms	
Drift due to ambient temperature change	±16 μA/10 ˚C	
Maximum current consumption	230 mA (5 V DC), 540 mA (24 V DC)	
Weight	Approx. 0.40 kg	
External communication	Pressure clamp terminal, MIL connector cable, dedicated cable (KS1)	
HART communication	Available	

*1: A dual-redundant configuration is enabled by using two identical modules with the same switch-over response (standard or fast).

*2: When AAI543-□6□/-□F□ is installed in a node unit that conforms to the temperature environment, use it in the ambient temperature within 0 to 60 ºC range.


*3: When a switch over from control to stand-by module takes place in the dual-redundant configuration, the maximum period of time when the field output falls below 4 mA is 100 ms for AAI543-□5□/-□E□ (standard switch-over response) and 2 ms for AAI543-□6□/-□F□ (fast switch-over response). In case of connecting fast response type field devices, use AAI543-□6□/-□F□ (fast switch-over response) in the dual-redundant configuration.

*4: When the dedicated cable is used, the withstanding voltage is 500 V AC (between the input signal and the system). When the ML connector cable is used, the withstanding voltage depends on the electrical specifications of the cable.

All Rights Reserved. Copyright © 2015, Yokogawa Electric Corporation

■ EXTERNAL DIMENSIONS

● AAI141, AAV141, AAV144, AAI841, AAB841, AAV544, AAI143, AAI543, AAI135, AAI835, AAP135, AAB141, AAB842

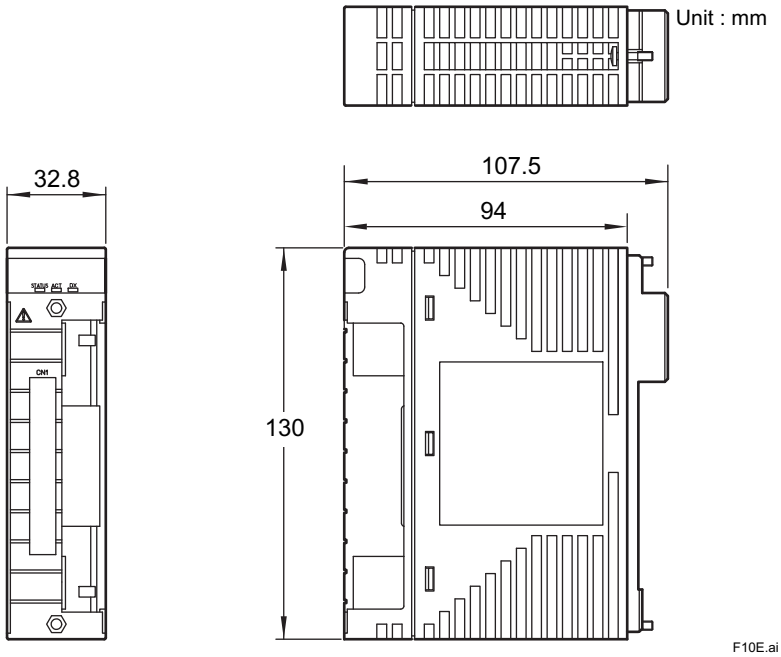


Nominal Tolerances :

When the reference dimension is over 0.5 mm and equal or less than 120 mm, its nominal tolerance is ± 0.8 mm, while its combination of nominal tolerance is ± 1.5 mm.

When the reference dimension is over 120 mm, its nominal tolerance is in accordance with JEM 1459.

● AAT145, AAP849

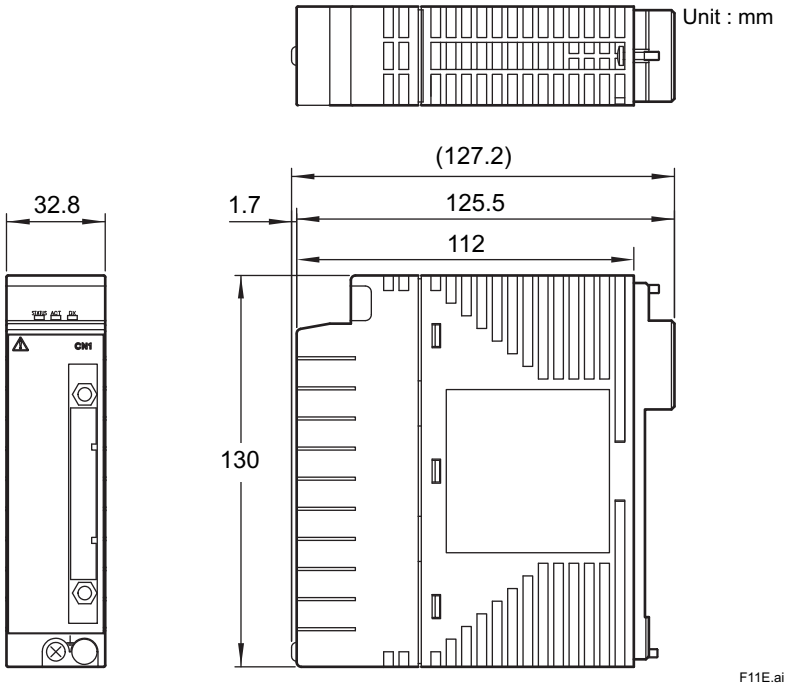

Nominal Tolerances :

When the reference dimension is over 0.5 mm and equal or less than 120 mm, its nominal tolerance is ± 0.8 mm, while its combination of nominal tolerance is ± 1.5 mm.

When the reference dimension is over 120 mm, its nominal tolerance is in accordance with JEM 1459.

All Rights Reserved. Copyright © 2015, Yokogawa Electric Corporation

		Description
Model	AAB841	Analog I/O Module (1 to 5 V input, 4 to 20 mA output, 8-channel input/8-channel output, Non-Isolated)
Suffix Codes	-S	Standard type
	5	With no explosion protection
	E	With explosion protection
	0	Basic type
	3	With ISA Standard G3 option and temperature (-20 to 70 °C) option
Option Codes	/K4A00	With KS Cable Interface Adapter [Model : ATK4A-00]
	/M4A00	With MAC2 Compatible Adapter [Model : ATM4A-00]
	/V4A00	With VM2 Compatible Adapter [Model : ATV4A-00] (*1)
	/A4S00	With Pressure Clamp Terminal Block for Analog [Model : ATA4S-00]
	/A4S10	With Pressure Clamp Terminal Block for Analog (surge absorber) [Model : ATA4S-10]
	/A4D00	With Dual Pressure Clamp Terminal Block for Analog [Model : ATA4D-00]
	/A4D10	With Dual Pressure Clamp Terminal Block for Analog (surge absorber) [Model : ATA4D-10]
	/CCC01	With Connector Cover for MIL Cable [Model : ACCC01]

*1: When using this adapter, 4 to 20 mA output (8-channel) of AAB841 varies to 1 to 5 V output.

		Description
Model	AAB842	Analog I/O Module (1 to 5 V/4 to 20 mA input, 4 to 20 mA output, 8-channel input/8-channel output, Non-Isolated)
Suffix Codes	-H	With digital communication (HART protocol)
	5	With no explosion protection
	E	With explosion protection
	0	Basic type
	3	With ISA Standard G3 option and temperature (-20 to 70 °C) option
Option Codes	/M4A00	With MAC2 Compatible Adapter [Model : ATM4A-00]
	/V4A00	With VM2 Compatible Adapter [Model : ATV4A-00] (*1)

*1: When using this adapter, 4 to 20 mA output (8-channel) of AAB842 varies to 1 to 5 V output.

		Description
Model	AAI143	Analog Input Module (4 to 20 mA, 16-channel, Isolated)
Suffix Codes	-S	Standard type
	-H	With digital communication (HART protocol)
	5	With no explosion protection
	E	With explosion protection
	0	Basic type
	3	With ISA Standard G3 option and temperature (-20 to 70 °C) option
Option Codes	/K4A00	With KS Cable Interface Adapter (For connecting AEA4D Terminal Board) [Model: ATK4A-00]
	/A4S00	With Pressure Clamp Terminal Block [Model: ATA4S-00]
	/A4S10	With Pressure Clamp Terminal Block (surge absorber) [Model: ATA4S-10]
	/A4D00	With Dual Pressure Clamp Terminal Block [Model: ATA4D-00]
	/A4D10	With Dual Pressure Clamp Terminal Block (surge absorber) [Model: ATA4D-10]
	/CCC01	With Connector Cover for MIL Cable [Model: ACCC01]

All Rights Reserved. Copyright © 2015, Yokogawa Electric Corporation