Yokogawa AAI543-H50

16-Channel HART Analog Output Module

Yokogawa AAI543-H50 delivers sixteen 4–20 mA control outputs from a CENTUM FIO system to compatible field devices, including control devices that use HART communication. It is suited to process-output duties where the analog command and digital instrument information are both needed. The module supports dual-redundant operation, but AAI543-H50 is the standard switchover-response version. Matching this response class matters when replacing one member of an installed redundant pair.



Technical Specifications

Product Identity	
Manufacturer	Yokogawa
Complete model	AAI543-H50
Dimensions (W × H × D)	32.8 × 130 × 107.5 mm; module only
Functional Configuration	
Function	Analog output with HART communication
Output channels	16; isolated output module
Output signal	4–20 mA DC
Open-circuit detection	Less than 0.65 mA
Redundancy response	Standard; output below 4 mA during switchover for 100 ms maximum
Performance & Power	
Allowable load resistance	0–750 Ω
Accuracy	±48 µA
Data update period	10 ms
Maximum current consumption	230 mA at 5 V DC; 540 mA at 24 V DC
Environment	
Protection option	Standard response version without explosion protection

Selected original manufacturer pages follow on pages 3–5.

Celine unity@mvme.cn +86-18020776786

Compatibility & Selection Guide

System compatibility. AAI543-H50 is a CENTUM FIO module; the Release 6 environment includes AFV30/AFV40 stations with VP6F1700 and VP6E5100 engineering. In a redundant arrangement, use two modules with the same switchover response. The H50 code identifies HART, standard response without explosion protection and the basic type; it must not be substituted by code resemblance alone.

Wiring & Installation Reference

Signal and connection checks

Output loop. 4–20 mA DC · Total load 0–750 Ω

Open circuit. Below 0.65 mA · Review output-loop continuity

Redundant pair. Same response class · Standard response for -H50

Module fit and configuration

Confirm the system position.. Match the field control unit, node type, complete module code and existing configuration before replacement.

Match termination and dimensions.. Use the specified terminal/cable interface and check the module envelope against the installed assembly.

Verify the configured function.. Match the -H50 standard switchover response, hardware Style and terminal option; a redundant pair must use the same response class.

Installation precautions. Match the response class of both redundant modules before replacement. Verify loop load and the exact terminal/cable option; cable electrical ratings can limit the complete installation isolation rating.

View connection specifications (PDF) · PDF page 3 | View mounting dimensions (PDF) · PDF page 4

Manufacturer sources: Analog I/O Modules (for FIO).

● Current Input Modules (Isolated)

This module provides 16 inputs of 4 to 20 mA signal. It can be used in dual-redundant configuration.

Items		Specifications
Model		**AAI143 (*1)**
Number of input channels		16, isolated
Input signal		4 to 20 mA
Allowable input current		24 mA
Withstanding voltage		Between input and system: 1500 V AC, for 1 minute (*3)
Input resistance	**Power ON**	270 Ω (20 mA) to 350 Ω (4 mA) (*2)
	Power OFF	500 kΩ or larger
Accuracy		±16 μA
Data update period		10 ms
Transmitter power supply		19.0 V or higher (at 20 mA) 25.5 V or less (at 0 mA) (output current limit: 25 mA) (*4)
Setting of 2-wire or 4-wire transmitter		For each channel by setting pin
Drift due to ambient temperature change		±16 μA/10 ˚C
Maximum current consumption		230 mA (5 V DC), 540 mA (24 V DC)
Weight		Approx. 0.30 kg
External communication		Pressure clamp terminal, MIL connector cable, dedicated cable (KS1)
HART communication		Available

*1: A Zener barrier is not allowed to be connected with this module. Use an isolation barrier when the module is used in intrinsically safe application.

*2: The module input resistance viewed from the terminals depends on the current strength as calculated as below:

$$250\ \Omega + \frac{\text{voltage drop in the input protection circuit}}{\text{current value}}$$

F04E.ai

*3: When the dedicated cable is used, the withstanding voltage is 500 V AC (between the input signal and the system). When the ML connector cable is used, the withstanding voltage depends on the electrical specifications of the cable.

*4: This voltage is generated between the connecting terminals for 2-wire transmitters for this module. When calculating the minimum operating voltage for transmitters, consider to allow margins for voltage drop in external wiring.

● Current Output Module (Isolated)

This module provides 16 outputs of 4 – 20 mA signal. It can be used in dual-redundant configuration. (*1)

Items	Specifications	
Model	**AAI543-□5□/-□E□**	**AAI543-□6□/-□F□** (*2)
Number of output channels	16, isolated, standard switch-over response in redundant configuration (*3)	16, isolated, fast switch-over response in redundant configuration (*3)
Output signal	4 to 20 mA	
Withstanding voltage	Between output and system: 1500 V AC, for 1 minute (*4)	
Allowable load resistance	0 to 750 Ω	
Circuit-open detection	Less than 0.65 mA	
Accuracy	±48 μA	
Data update period	10 ms	
Drift due to ambient temperature change	±16 μA/10 ˚C	
Maximum current consumption	230 mA (5 V DC), 540 mA (24 V DC)	
Weight	Approx. 0.40 kg	
External communication	Pressure clamp terminal, MIL connector cable, dedicated cable (KS1)	
HART communication	Available	

*1: A dual-redundant configuration is enabled by using two identical modules with the same switch-over response (standard or fast).

*2: When AAI543-□6□/-□F□ is installed in a node unit that conforms to the temperature environment, use it in the ambient temperature within 0 to 60 ºC range.


*3: When a switch over from control to stand-by module takes place in the dual-redundant configuration, the maximum period of time when the field output falls below 4 mA is 100 ms for AAI543-□5□/-□E□ (standard switch-over response) and 2 ms for AAI543-□6□/-□F□ (fast switch-over response). In case of connecting fast response type field devices, use AAI543-□6□/-□F□ (fast switch-over response) in the dual-redundant configuration.

*4: When the dedicated cable is used, the withstanding voltage is 500 V AC (between the input signal and the system). When the ML connector cable is used, the withstanding voltage depends on the electrical specifications of the cable.

All Rights Reserved. Copyright © 2015, Yokogawa Electric Corporation

■ EXTERNAL DIMENSIONS

● AAI141, AAV141, AAV144, AAI841, AAB841, AAV544, AAI143, AAI543, AAI135, AAI835, AAP135, AAB141, AAB842

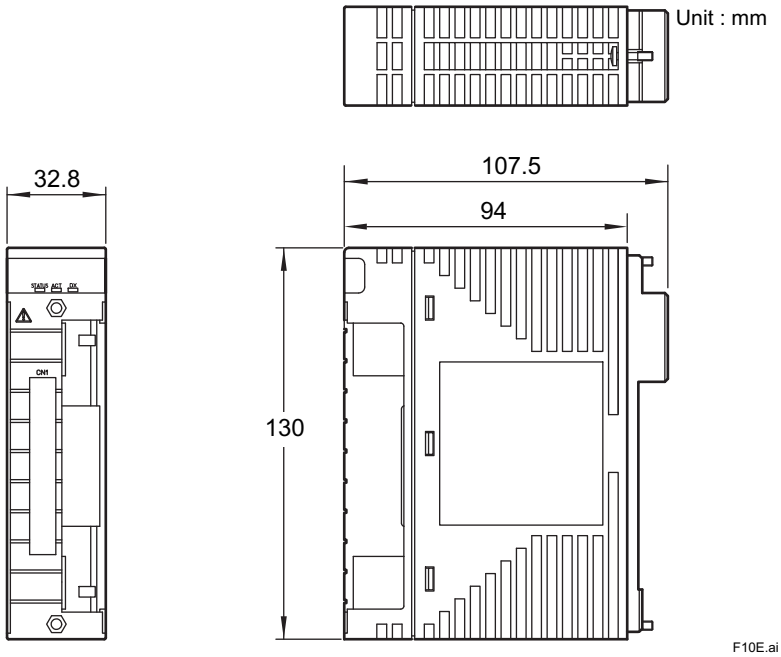


Nominal Tolerances :

When the reference dimension is over 0.5 mm and equal or less than 120 mm, its nominal tolerance is ± 0.8 mm, while its combination of nominal tolerance is ± 1.5 mm.

When the reference dimension is over 120 mm, its nominal tolerance is in accordance with JEM 1459.

● AAT145, AAP849

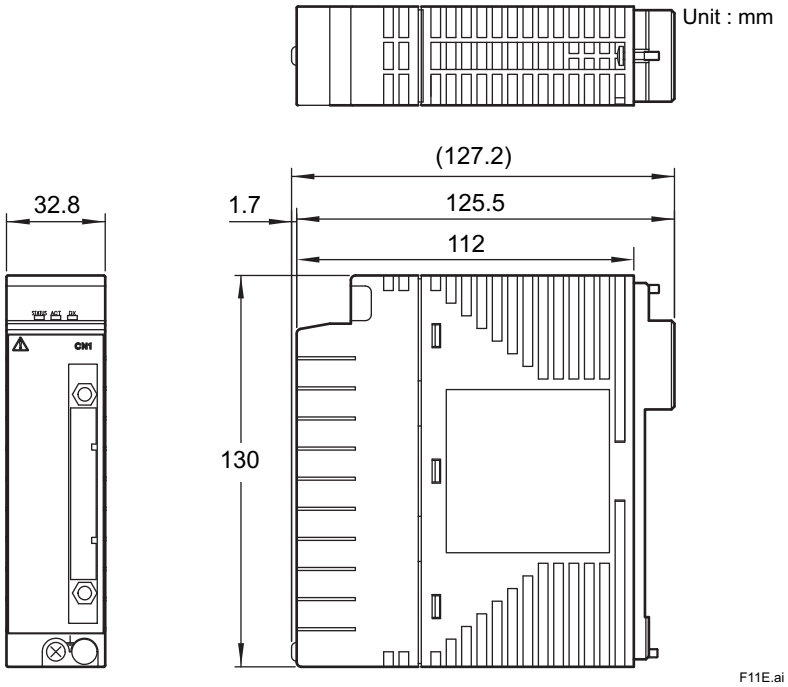

Nominal Tolerances :

When the reference dimension is over 0.5 mm and equal or less than 120 mm, its nominal tolerance is ± 0.8 mm, while its combination of nominal tolerance is ± 1.5 mm.

When the reference dimension is over 120 mm, its nominal tolerance is in accordance with JEM 1459.

All Rights Reserved. Copyright © 2015, Yokogawa Electric Corporation

		Description
Model	AAI543	Analog Output Module (4 to 20 mA, 16-channel, Isolated)
Suffix Codes	-S	Standard type
	-H	With digital communication (HART protocol)
	5	Standard switch-over response in redundant configuration with no explosion protection(*1)
	6	Fast switch-over response in redundant configuration with no explosion protection(*2)
	E	Standard switch-over response in redundant configuration with explosion protection(*1)
	F	Fast switch-over response in redundant configuration with explosion protection(*2)
	0	Basic type
	1	With ISA Standard G3 option
	3	With ISA Standard G3 option and temperature (-20 to 70 °C) option
Option Codes	/K4A00	With KS Cable Interface Adapter (For connecting AEA4D Terminal Board) [Model: ATK4A-00]
	/A4S00	With Pressure Clamp Terminal Block [Model: ATA4S-00]
	/A4S10	With Pressure Clamp Terminal Block (surge absorber) [Model: ATA4S-10]
	/A4D00	With Dual Pressure Clamp Terminal Block [Model: ATA4D-00]
	/A4D10	With Dual Pressure Clamp Terminal Block (surge absorber) [Model: ATA4D-10]
	/CCC01	With Connector Cover for MIL Cable [Model: ACCC01]

*1: If “standard switch-over response in redundant configuration” is selected, “basic type” or “with ISA Standard G3 option and temperature (-20 to 70 °C) option” may be specified.
*2: If “fast switch-over response in redundant configuration” is selected, “basic type” or “with ISA Standard G3 option” may be specified.

		Description
Model	AAV144	Analog Input Module (-10 to +10 V, 16-channel, Isolated)
Suffix Codes	-S	Standard type
	5	With no explosion protection
	E	With explosion protection
	0	Basic type
	3	With ISA Standard G3 option and temperature (-20 to 70 °C) option
Option Codes	/K4A00	With KS Cable Interface Adapter [Model: ATK4A-00]
	/A4S00	With Pressure Clamp Terminal Block for Analog [Model: ATA4S-00]
	/A4S10	With Pressure Clamp Terminal Block for Analog (surge absorber) [Model: ATA4S-10]
	/A4D00	With Dual Pressure Clamp Terminal Block for Analog [Model: ATA4D-00]
	/A4D10	With Dual Pressure Clamp Terminal Block for Analog (surge absorber) [Model: ATA4D-10]
	/CCC01	With Connector Cover for MIL Cable [Model: ACCC01]

		Description
Model	AAV544	Analog Output Module (-10 to +10 V, 16-channel, Isolated)
Suffix Codes	-S	Standard Type
	5	With no explosion protection
	E	With explosion protection
	0	Basic type
	3	With ISA Standard G3 option and temperature (-20 to 70 °C) option
Option Codes	/K4A00	With KS Cable Interface Adapter [Model : ATK4A-00]
	/A4S00	With Pressure Clamp Terminal Block for Analog [Model : ATA4S-00]
	/A4S10	With Pressure Clamp Terminal Block for Analog (surge absorber) [Model : ATA4S-10]
	/A4D00	With Dual Pressure Clamp Terminal Block for Analog [Model : ATA4D-00]
	/A4D10	With Dual Pressure Clamp Terminal Block for Analog (surge absorber) [Model : ATA4D-10]
	/CCC01	With Connector Cover for MIL Cable [Model : ACCC01]

All Rights Reserved. Copyright © 2015, Yokogawa Electric Corporation